


Walk-and-Talk™ Interactive Whiteboard

Collaborate
Inspire
Captivate



Intuitive Remote Control

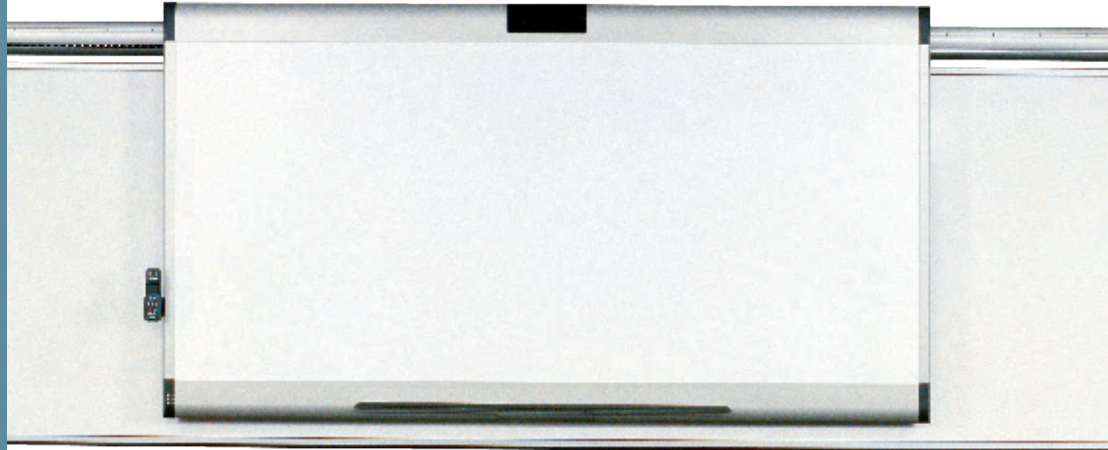

PolyKey™ Technology



Power and Data Track *

* Walk-and-Talk board shown on Power and Data Track System over a Commercial Series Markerboard

Maximize Your Presentation Impact

Walk among your audience or work directly at your PolyVision Walk-and-Talk™ Interactive Whiteboard to present, interact with, and capture images digitally. Instantly save or print anything written on the whiteboard, or add front projection to interact with the touch-sensitive surface. Write directly on the surface with your finger or standard dry-erase markers, or actively engage your audience with the intuitive remote control.

Award Winning Family

The interactive whiteboard is a member of the award-winning Walk-and-Talk Product Family, and shares these key, easy-to-use attributes: PolyKey™


Technology enables instant plug-and-play so you can use any Walk-and-Talk product instantly, without having to pre-load or learn new software; and the intuitive remote control allows you to control all your computer applications from any point in the room.

The Freedom to Move and Inspire

Optimize your flexibility with any one of the interactive whiteboard's accessories, including the world's only "feathertouch" Adjustable Height Stand or wall-mounted Power and Data Track.

Walk-and-Talk Interactive Whiteboard:
Don't just present – inspire.

POLYVISION
A Steelcase Company

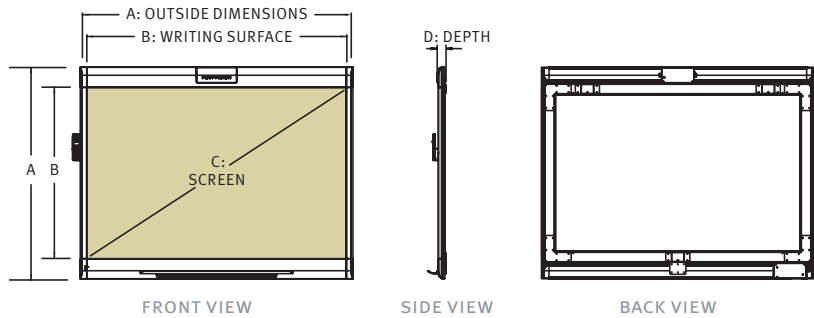

Interactive Whiteboard	WT 1400	WT 1600	WT 1800
Dimension A (HXW)	44.6 in. x 47.8 in. (1133mm x 1214mm)	52.6 in. x 67.8 in. (1336mm x 1722mm)	52.6 in. x 97.8 in. (1336mm x 2484mm)
Dimension B (HXW)	35.0 in. x 45.0 in. (889mm x 1143mm)	43.0 in. x 65.0 in. (1092mm x 1651mm)	43.0 in. x 95.0 in. (1092mm x 2413mm)
Dimension C (Diagonal)	57.0 in. (1448mm)	78.0 in. (1981mm)	104.0 in. (2642mm)
Dimension D (Depth)	4.3 in. (110mm)	4.3 in. (110mm)	4.3 in. (110mm)
Resolution	8000 x 8000	8000 x 8000	8000 x 8000
Weight	52 lbs (23.6kg)	78 lbs (35.4kg)	104 lbs (47.0kg)

Surface material

Touch-sensitive, Teflon® coated, dry erase, low glare, projection-optimized surface

Power Requirements

120V/240V, 50-60hz, 5W, wall-mounted power supply

Certification

FCC class A, CE

Driver/Software Features

- Instant loading PolyKey™ driver for walk-up-and-use operation or Webster® software for advanced users
- On screen keyboard and image mark-up
- Print or save images in PDF, BMP, TIFF, PNG, or JPG image format (other options available with Webster software)

Accessories (Included)

- Remote control with built-in touch pad and trigger-click technology (two AA batteries included)
- Active infrared eraser with two spare eraser pads (two AAA batteries included)
- Power adapter with 15 foot (4.6m) cord
- 15 foot (4.6m) USB cable
- USB PolyKey™ with driver
- Stylus
- Getting started guide and manual
- Reversible remote control holder, mounts to either side of board
- Wall mounting brackets
- Two remote control lanyards

Computer Requirements

Microsoft Windows®:

- Windows 98, NT (wireless only), 2000, ME, XP, or Tablet XP
- 64 MB RAM (Win 98), 128 MB RAM (2000, ME, XP)
- One available USB port

Apple Macintosh®:

- Mac OS 8.6, 9, or X
- 256 MB RAM (Mac OS X), 128 MB (Mac OS 8.6, 9), Higher screen resolutions require more memory
- One available USB port

Warranty

- Two year limited warranty, free upgrade to five years upon product registration

Options

- Sliding Power and Data Track System
- Integrated room-blasting infrared wireless computer connection
- Cordless Adjustable Height Stand

Power and Data Track System

The Walk-and-Talk Power and Data Track System combines the ultimate space flexibility with aesthetics; hiding unsightly power cords and allowing users to slide their Walk-and-Talk board along the track, multiplying writing space and enhancing presentation capabilities. For optimal flexibility, specify track system that is at least double the length of your Walk-and-Talk board.

Track System	(HxWxD)
PD 0080* 8' Base Unit	4.2" x 96.0" x 1.7" (106.7mm x 2438.0mm x 43.2mm)
PD 0004 4' Extension	4.2" x 48.0" x 1.7" (106.7mm x 1219.0mm x 43.2mm)
PD 0008 8' Extension	4.2" x 96.0" x 1.7" (106.7mm x 2438.0mm x 43.2mm)
PD 0001* Endcaps pair	4.2" x 1.5" x 1.7" (106.7mm x 38.1mm x 43.2mm)

*Base unit and endcaps are required for system operation

Authorized PolyVision Dealer

PolyVision Corporation
1.800.620.POLY
info@polyvision.com
www.polyvision.com

POLYVISION
A Steelcase Company